
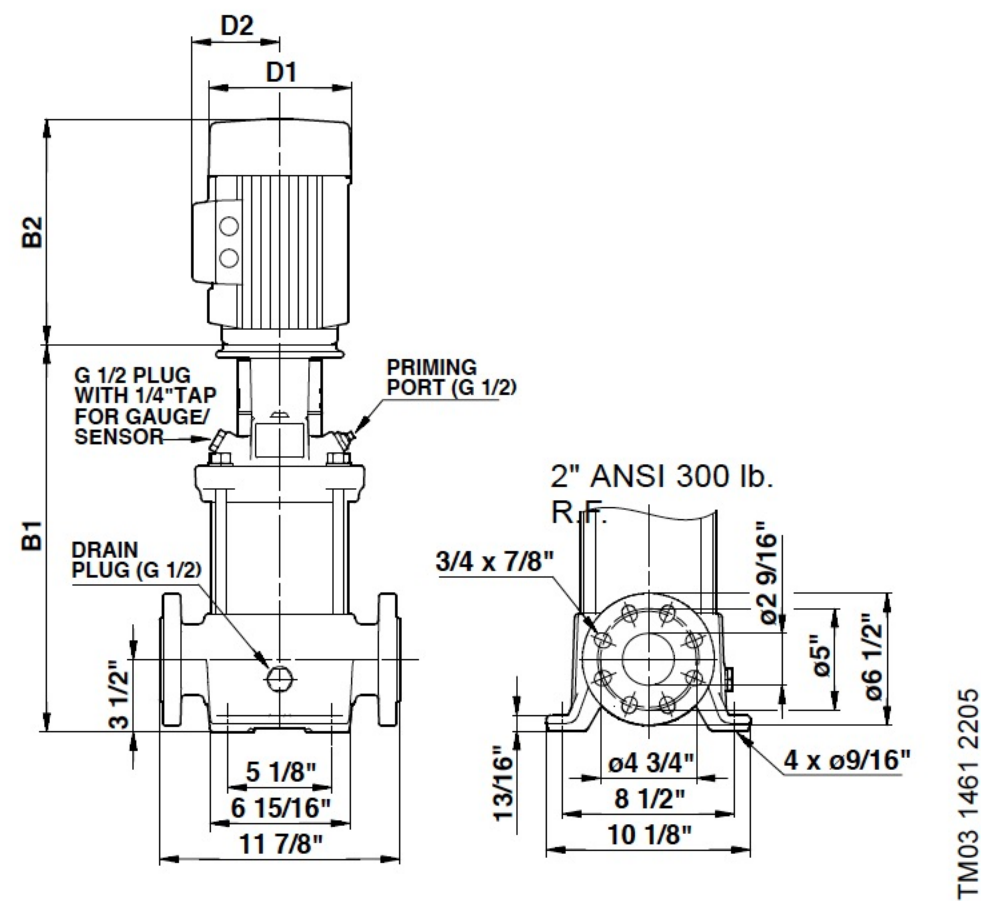


CR 15

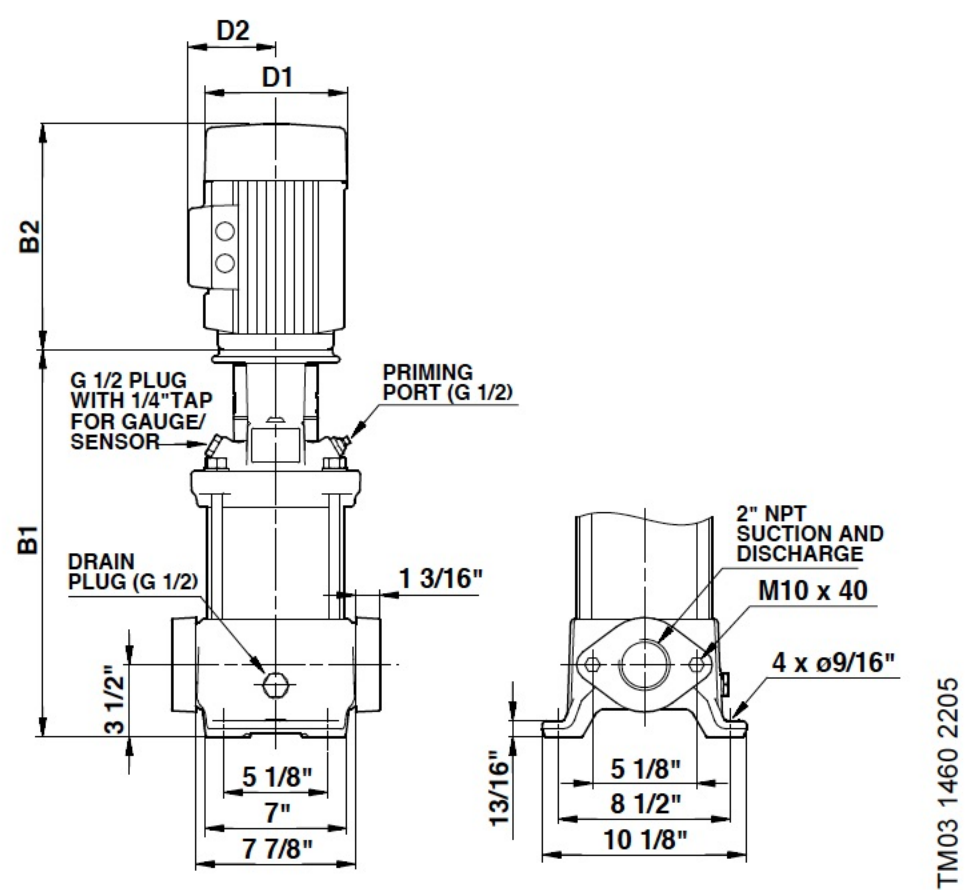

Pump type	P2 [Hp]	Ph.	Oval*	ANSI dimensions [inch (mm)]							Ship. wt. [lbs (kg)]
				B1	TEFC			ODP			
					D1	D2	B1+B2	D1	D2	B1+B2	
CR 15-1	2	1	•	16.46 (419)	7.19 (183)	5.73 (146)	29.02 (738)	-	-	-	139 (64)
		3	•	16.46 (419)	7.01 (179)	4.33 (110)	27.68 (704)	-	-	-	128 (59)
CR 15-2	5	1	•	17.20 (437)	10.62 (270)	7.46 (190)	32.72 (832)	-	-	-	205 (93)
		3	•	17.20 (437)	8.66 (220)	5.28 (135)	32.71 (831)	-	-	-	201 (92)
CR 15-3	7 1/2	1	•	19.29 (490)	10.22 (260)	7.62 (194)	34.82 (885)	-	-	-	223 (102)
		3	•	19.29 (490)	8.66 (220)	5.28 (135)	34.80 (884)	-	-	-	212 (97)
CR 15-4	7 1/2	1	•	21.06 (535)	10.22 (260)	7.62 (194)	36.59 (930)	-	-	-	225 (103)
		3	•	21.06 (535)	8.66 (220)	5.28 (135)	36.57 (929)	-	-	-	214 (98)
CR 15-5	10	1	•	22.83 (580)	10.23 (260)	10.30 (262)	38.90 (989)	-	-	-	342 (156)
		3	•	22.83 (580)	10.24 (261)	6.26 (160)	37.56 (955)	-	-	-	218 (99)
CR 15-6	15	3	-	27.17 (691)	12.36 (314)	8.00 (204)	45.71 (1162)	10.62 (270)	7.33 (187)	43.48 (1105)	347 (158)
CR 15-7	15	3	-	28.94 (736)	12.36 (314)	8.00 (204)	47.48 (1206)	10.62 (270)	7.33 (187)	45.25 (1150)	378 (172)
CR 15-8	15	3	-	30.71 (781)	12.36 (314)	8.00 (204)	49.25 (1251)	10.62 (270)	7.33 (187)	47.02 (1195)	409 (186)
CR 15-9	20	3	-	32.48 (825)	12.36 (314)	8.00 (204)	51.02 (1296)	11.50 (293)	8.92 (227)	52.17 (1326)	417 (190)
CR 15-10	20	3	-	34.25 (870)	12.36 (314)	8.00 (204)	52.79 (1341)	11.50 (293)	8.92 (227)	53.94 (1371)	421 (191)
CR 15-12	25	3	-	37.17 (945)	12.36 (314)	8.00 (204)	59.56 (1513)	11.50 (293)	8.94 (228)	57.98 (1473)	422 (192)

All dimensions in inches unless otherwise noted.

* Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 3 lbs. less.

- Available.