

MYERS® MS Series


1/3 and 1/2 HP Residential Sump Pumps - Zinc and Cast Iron Construction

SPECIFICATIONS

Applications	Basement sumps, dewatering	
Capacities	75 GPM	285 LPM
Shut-off head	25'	7.6 m
Operation:		
Tethered:	On	14" 356 mm
	Off	5" 127 mm
Vertical:	On	7.5" 190.5 mm
	Off	3" 76 mm
Solids handling	1/4"	6.4 mm
Liquids handling	Drain water	
Intermittent liquid temp	up to 140°F	up to 60°C
Motor	1/3 HP & 1/2 HP, PSC	
Electrical data	3450 RPM, 115V, 1Ø, 60Hz FLA 1/3 HP = 3.9, 1/2 HP = 4.1	
Acceptable pH range	6-9	
Shaft seal	Double lip	
Motor housing	Zinc	
Volute case	Cast iron	
Power cord	8'	2.4 m
Discharge, NPT	1-1/2"	
Min. sump diameter		
Float:	14"	356 mm
Vertical:	10"	254 mm

FEATURES

- Versatility for many light-duty jobs
- Designed for drain water removal or permanent applications with small amounts of debris
- Maintenance-free operation
- Wide-angle or vertical mechanical switch for small 10" diameter sumps
- Dual ball-bearing motor and double lip seal provide durability and longer pump life
- Durable PSC motor for years of service
- Oil-filled PSC motor for maximum heat dissipation, continuous bearing lubrication
- Thermal overload protection with automatic reset
- CSA Listed

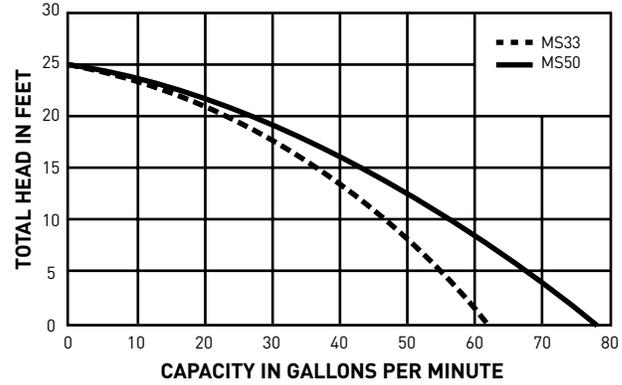

3 YEAR
WARRANTY




MODEL NUMBERS

- MS33V1
- MS33T1
- MS50V1
- MS50T1

MYERS[®] MS Series

1/3 and 1/2 HP Residential Sump Pumps

DIMENSIONS

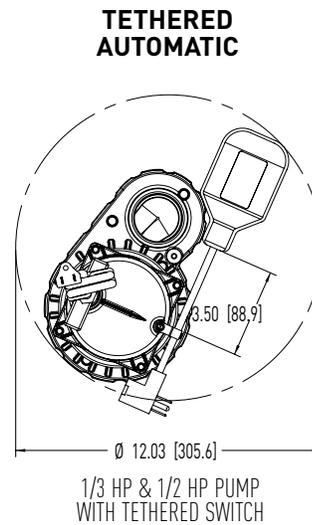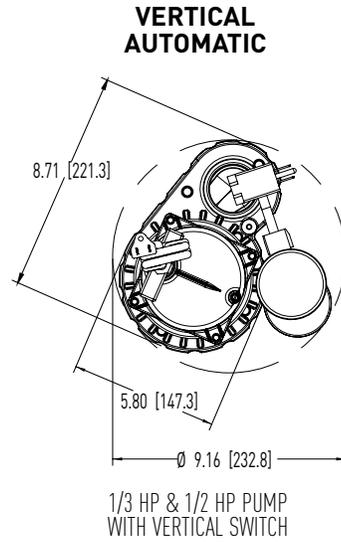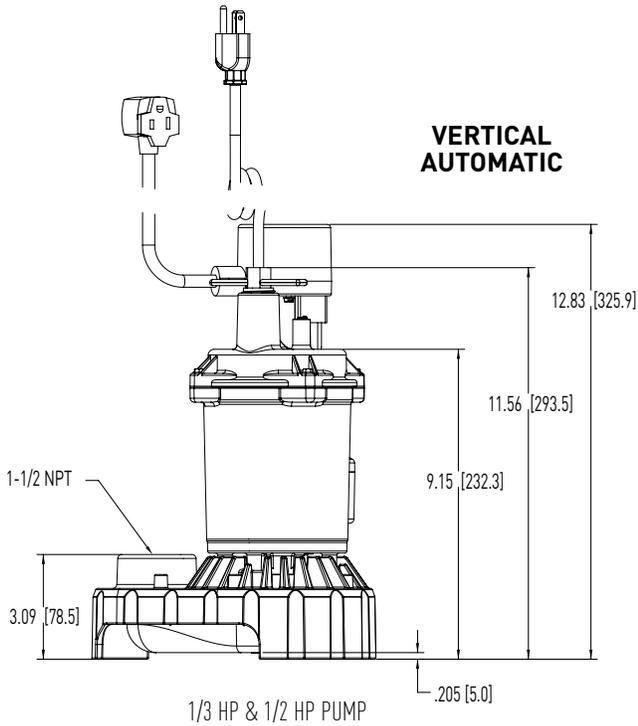

USA
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM
PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA
490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO, N1T 0A5
PH: 800-363-7867 FAX # 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.