


MODEL : 50CR2. 4S

BORE	OUT PUT		POLES	RPM	PHASE	VOLTAGE	HZ	RATED AMPERAGE	STARTING AMPS	STARTING METHOD	INS. CLASS	SOLIDS DIA.
	HP	kW										
2" (50mm)	1/2	0.4	2	3453	1	115	60	5.5	29.90	Capacitor Run	E	1 1/4" (35mm)

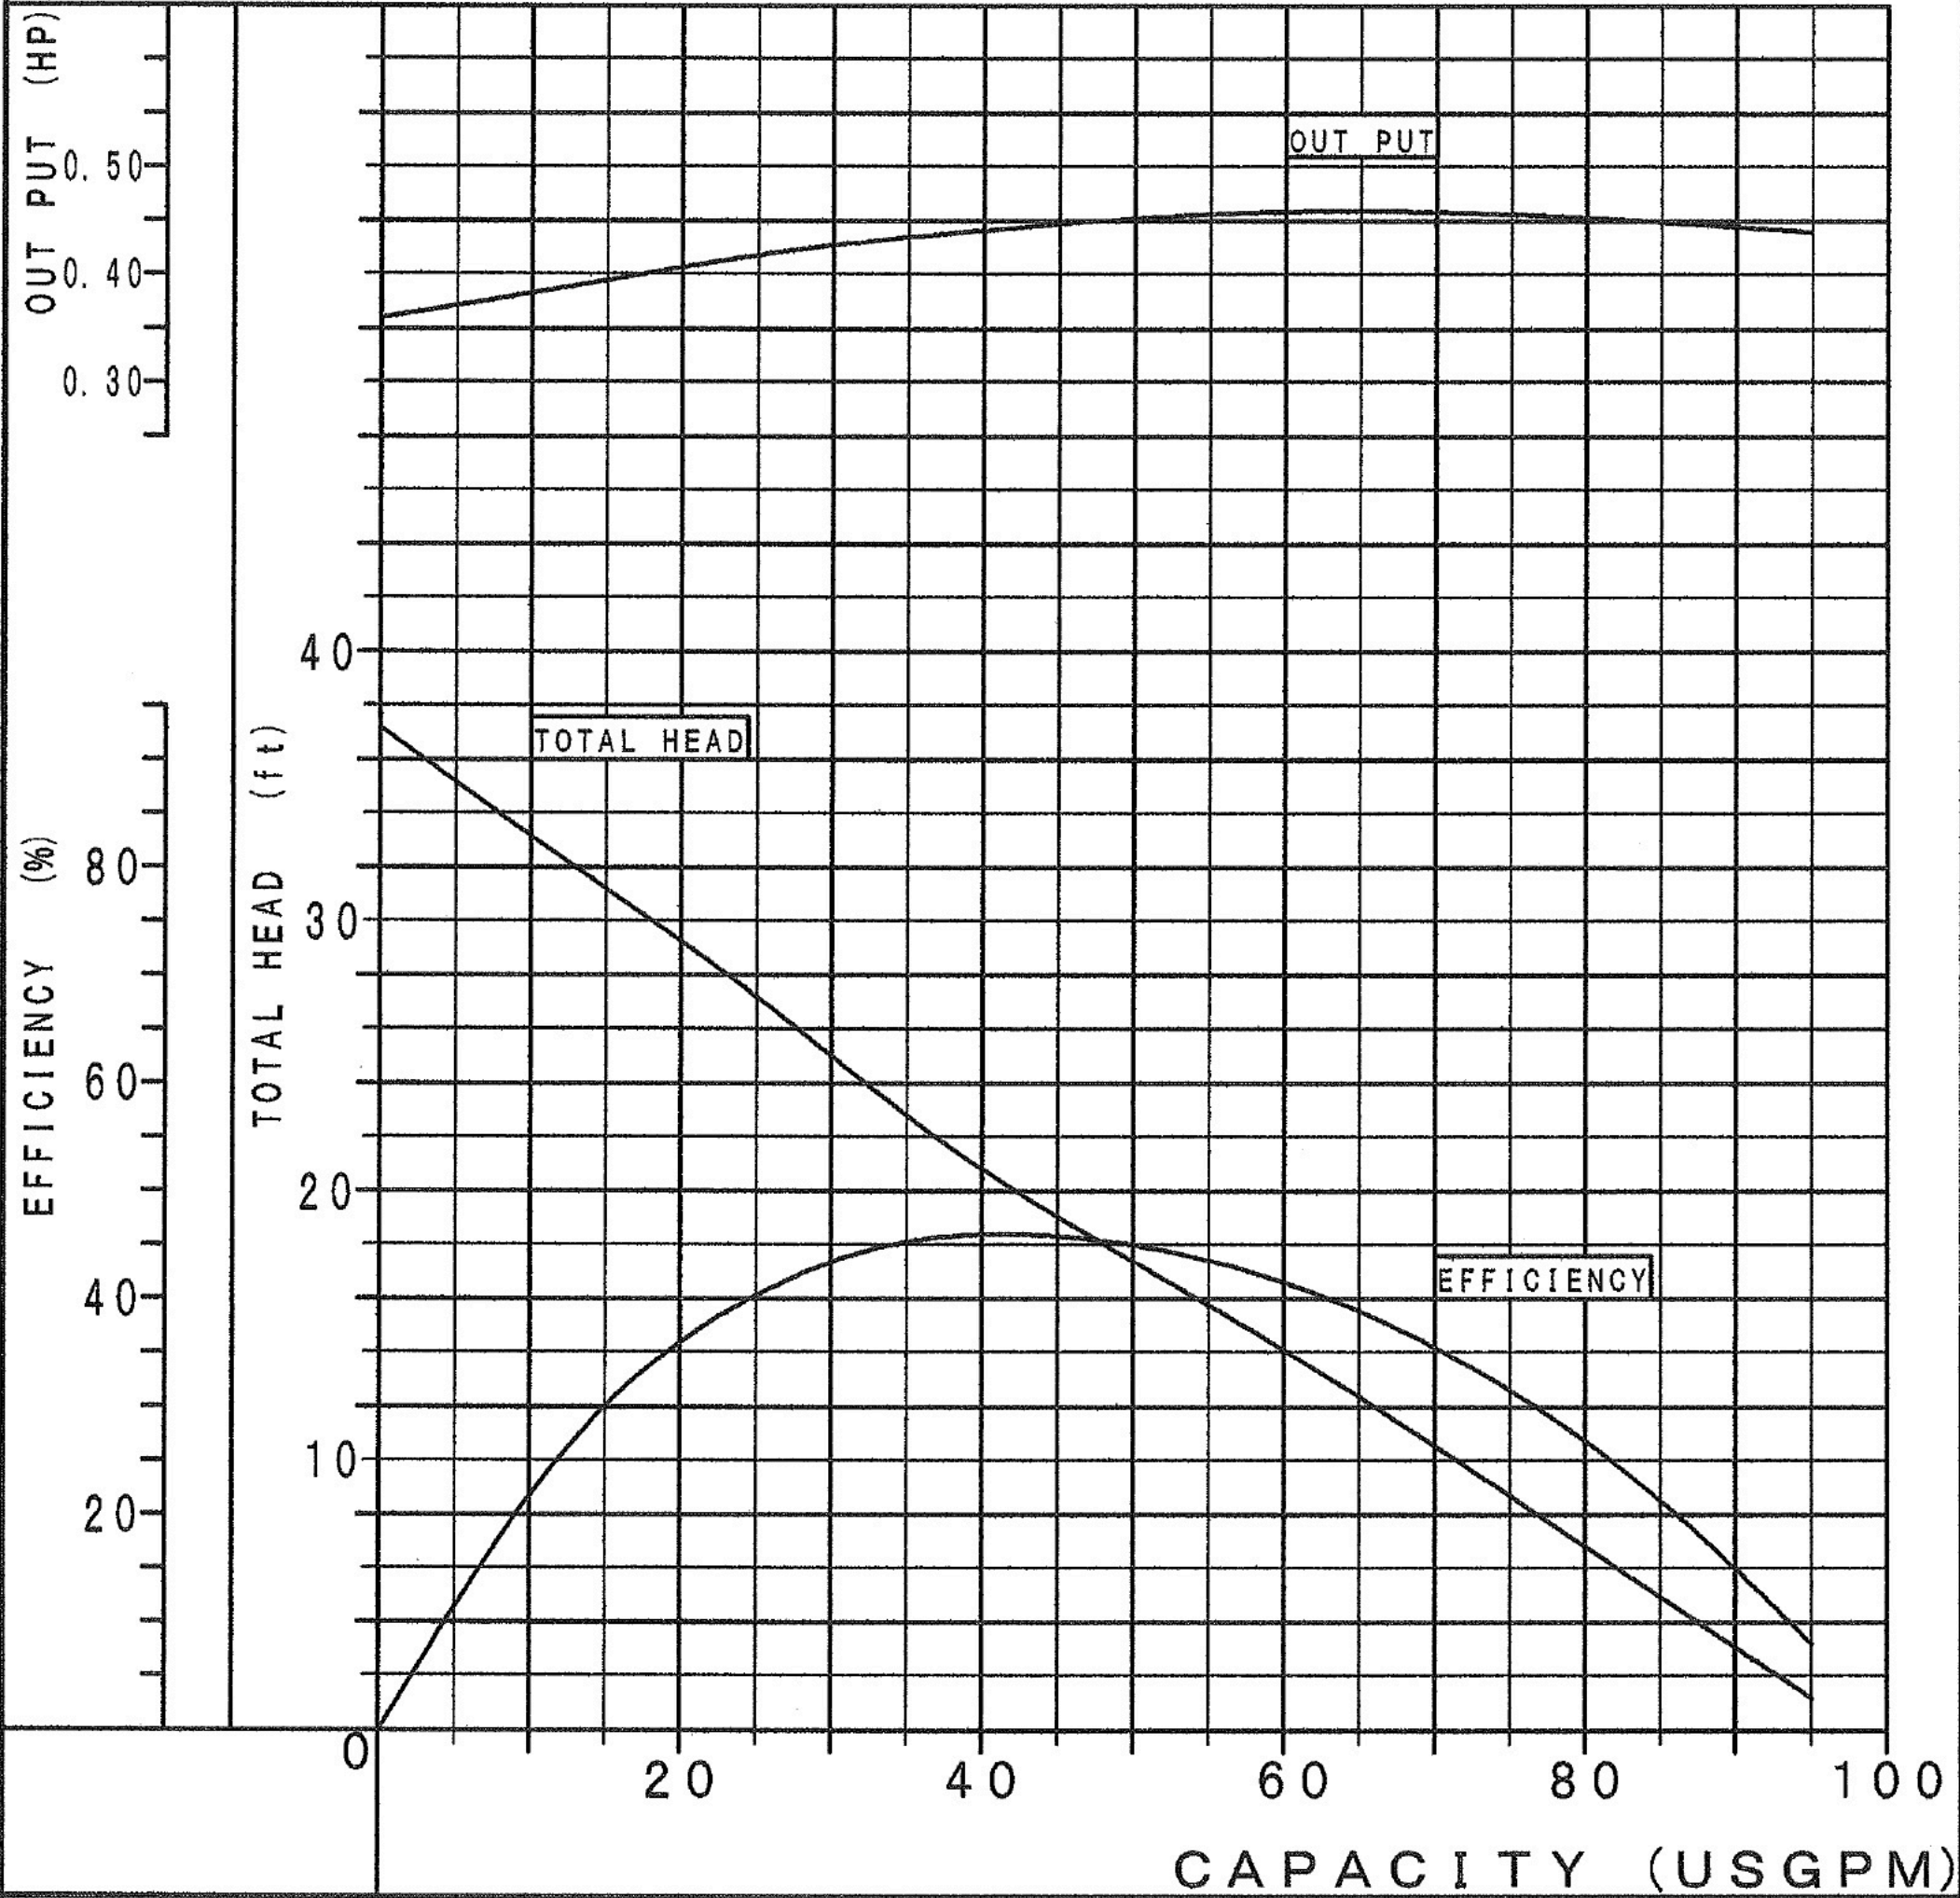

				TITLE	PERFORMANCE CURVE	DWG No.	Y 3 1 9 4 3