


MODEL : 50CR2. 25S

BORE	OUT PUT		POLES	RPM	PHASE	VOLTAGE	HZ	RATED AMPERAGE	STARTING AMPS	STARTING METHOD	INS. CLASS	SOLIDS DIA.
	HP	kW										
2" (50mm)	1/3	0.25	2	3358	1	115	60	4.4	20.20	Capacitor Run	E	1 1/4" (35mm)

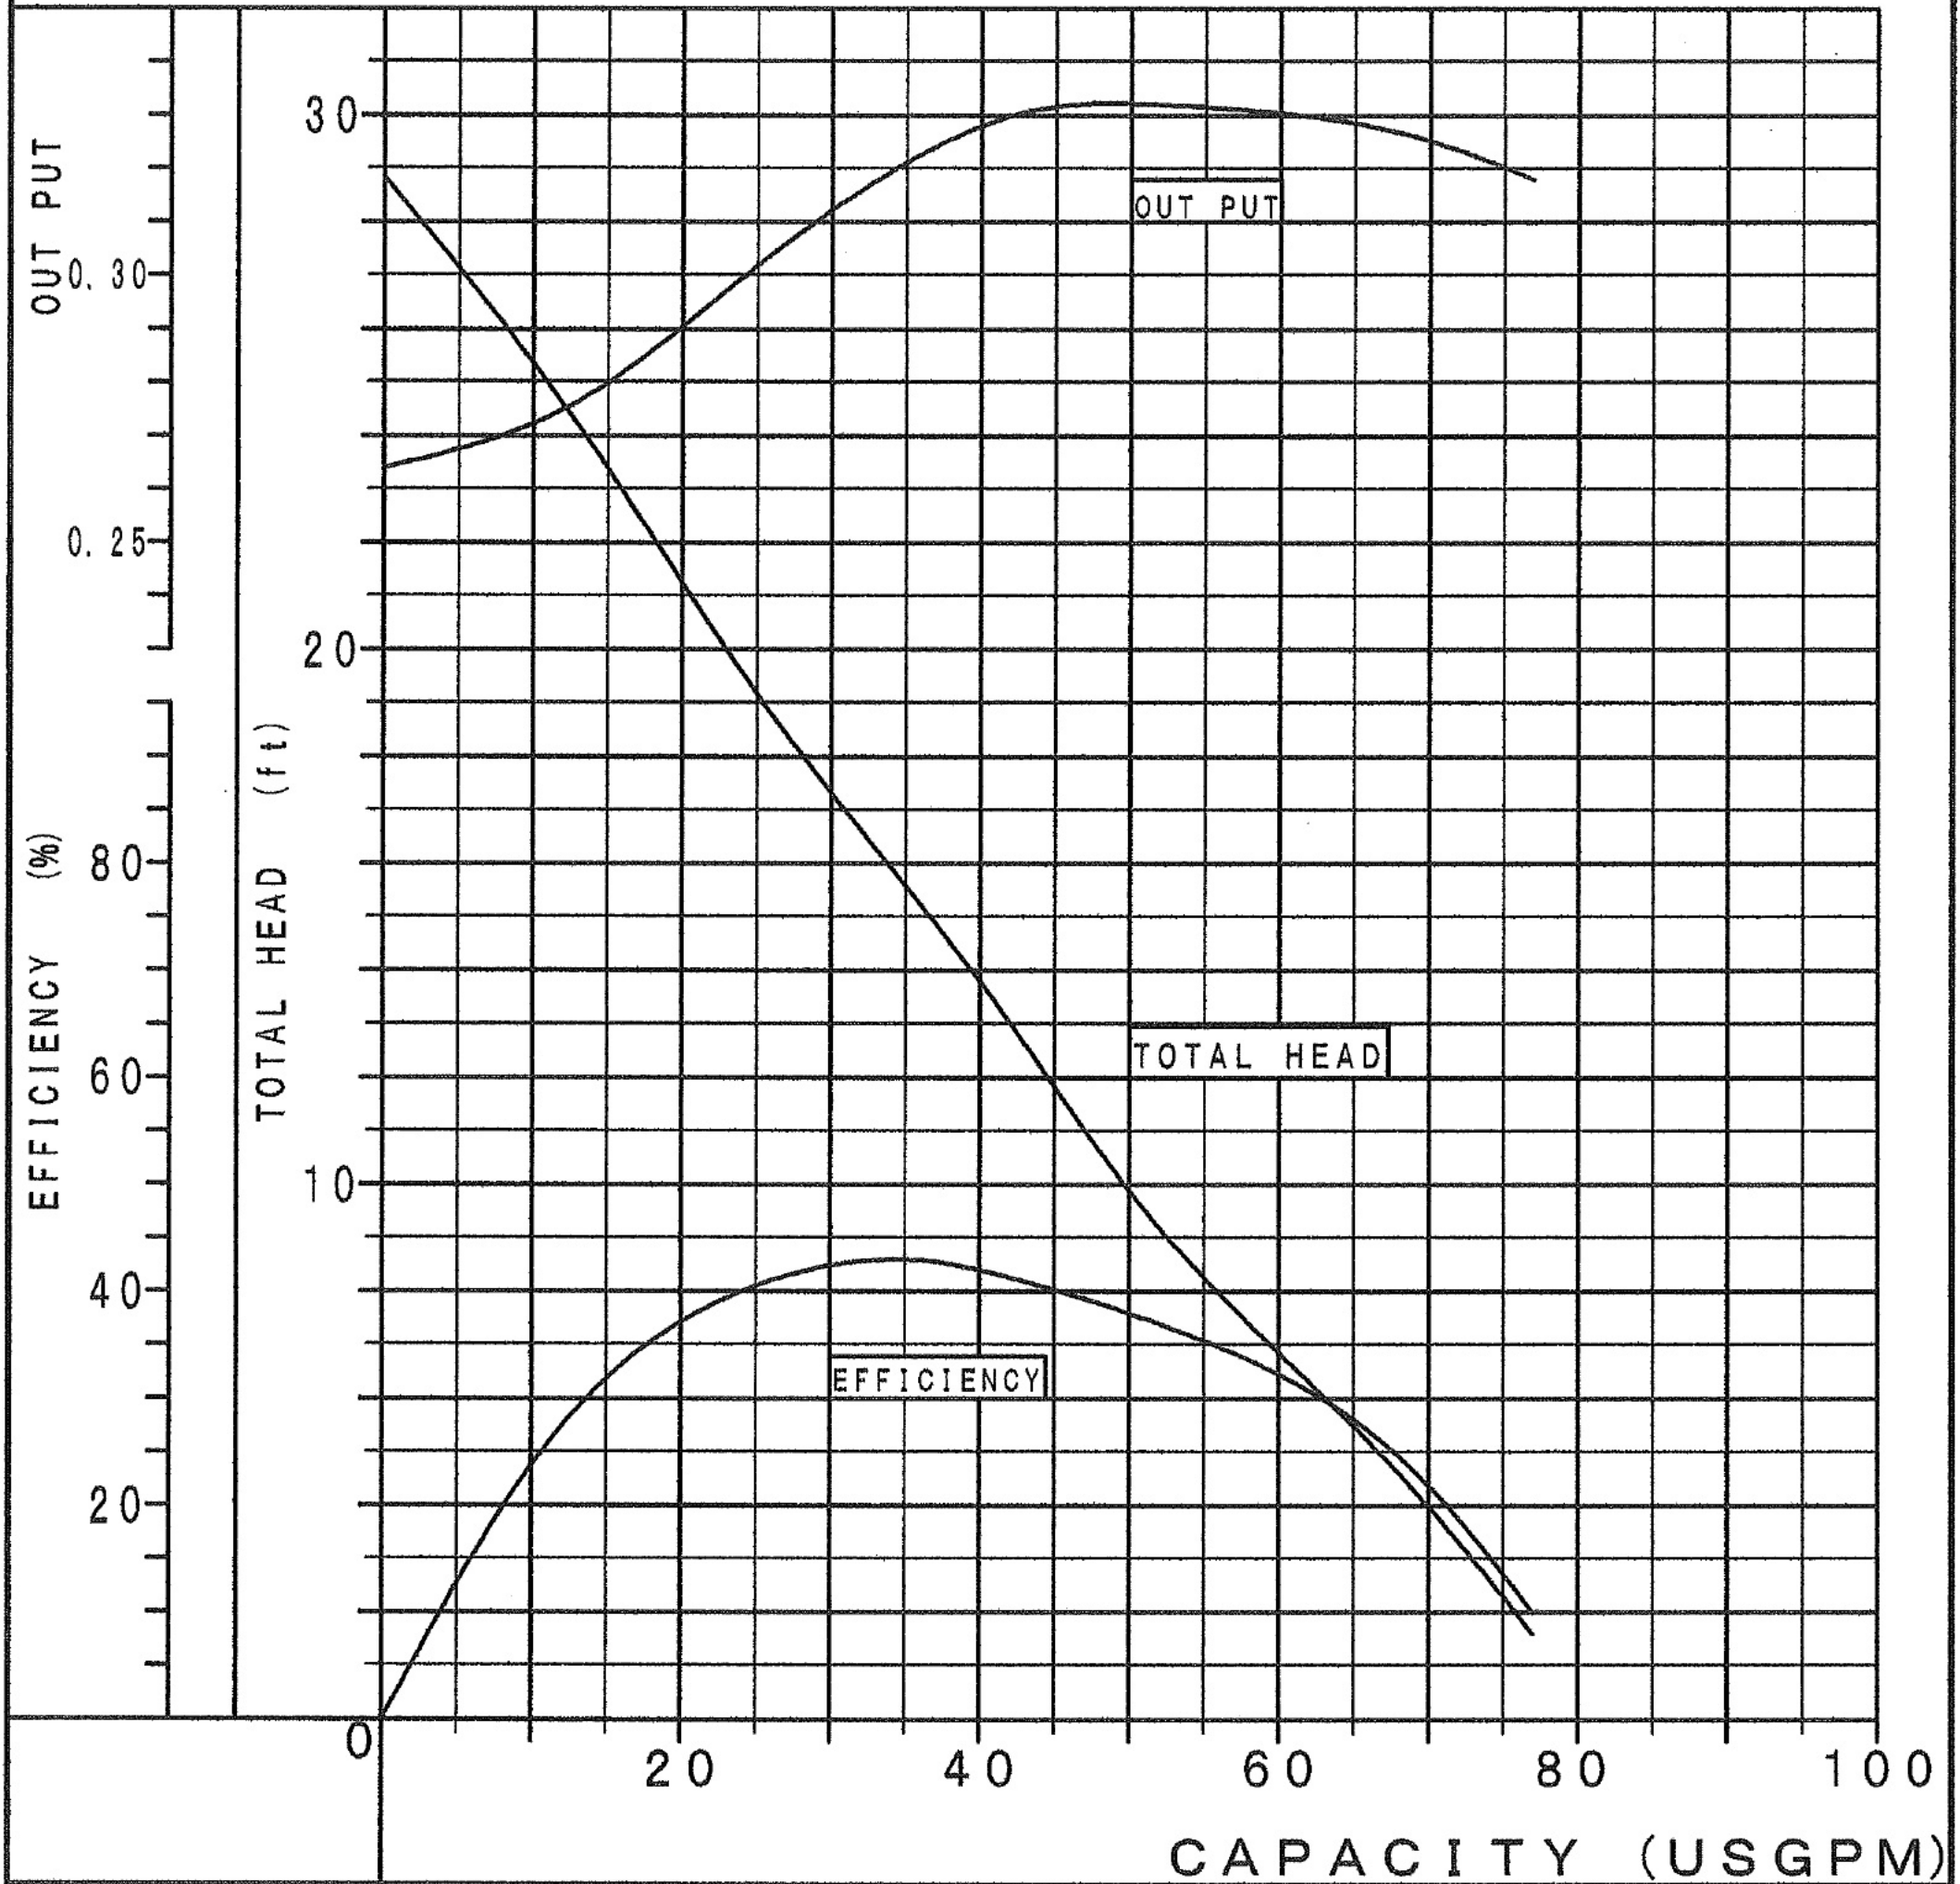

TITLE
PERFORMANCE CURVE

DWG No.
Y31942