



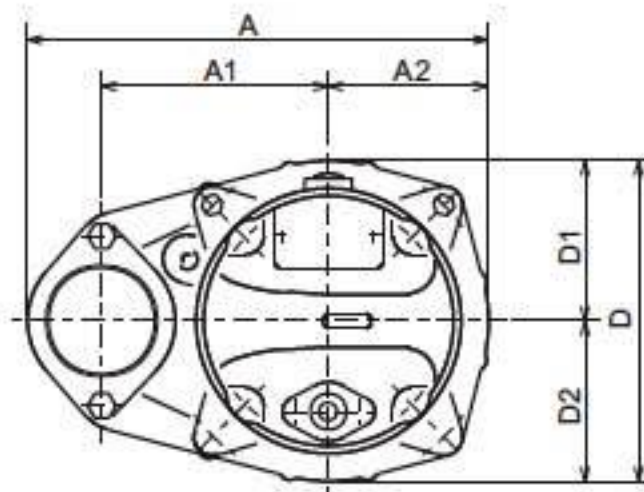

50PN2.25S
 50PN2.25
 50PN2.4S
 50PN2.4
 50PN2.75S
 50PN2.75

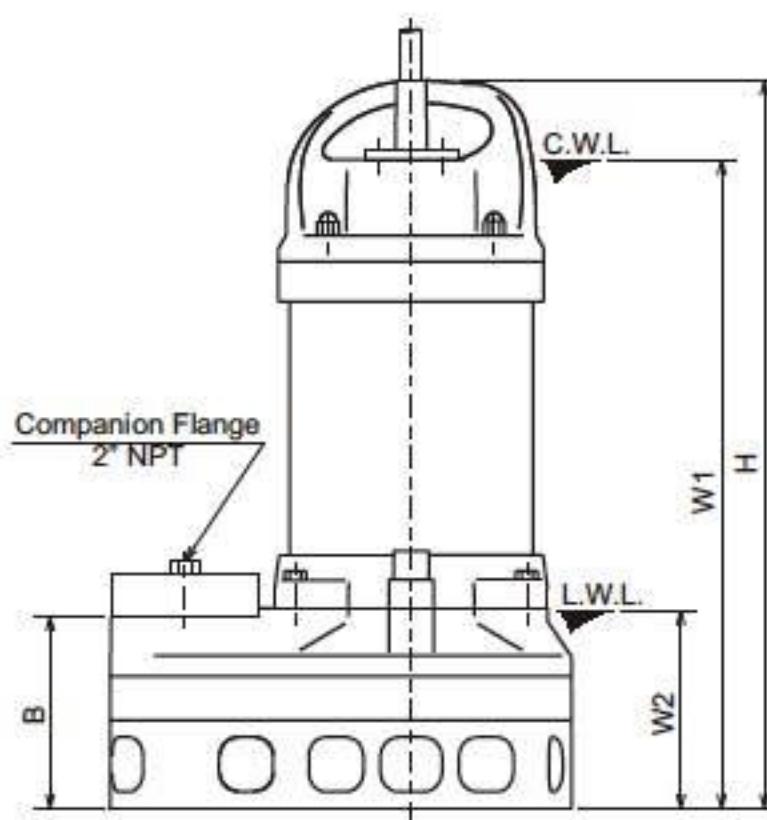

C.W.L. :Continuous running Water Level
 L.W.L. :Lowest running Water Level

DIMENSIONS:USCS (Inch)

Model	HP	NOM. SIZE	Pump & Motor								C.W.L.	L.W.L.	Wt. (lbs.)
			A	A1	A2	B	D	D1	D2	H	W1	W2	
50PN2.25S	1/3	2"	9 5/8	4 3/4	3 3/8	4	6 11/16	3 3/8	3 3/8	14 15/16	13 1/4	4 1/8	17.2
50PN2.25	1/3	2"	9 5/8	4 3/4	3 3/8	4	6 11/16	3 3/8	3 3/8	14 15/16	13 1/4	4 1/8	15.6
50PN2.4S	1/2	2"	9 5/8	4 3/4	3 3/8	4	6 11/16	3 3/8	3 3/8	15 1/4	13 5/8	4 1/8	18.7
50PN2.4	1/2	2"	9 5/8	4 3/4	3 3/8	4	6 11/16	3 3/8	3 3/8	15 1/4	13 5/8	4 1/8	17.6
50PN2.75S	1	2"	9 5/8	4 3/4	3 3/8	4	6 11/16	3 3/8	3 3/8	15 7/8	14 1/4	4 1/8	23.8
50PN2.75	1	2"	9 5/8	4 3/4	3 3/8	4	6 11/16	3 3/8	3 3/8	15 7/8	14 1/4	4 1/8	21.4

DIMENSIONS:METRIC (mm)

Model	kW	NOM. SIZE	Pump & Motor								C.W.L.	L.W.L.	Wt. (kg)
			A	A1	A2	B	D	D1	D2	H	W1	W2	
50PN2.25S	0.25	50	245	120	85	102	170	85	85	380	338	105	7.8
50PN2.25	0.25	50	245	120	85	102	170	85	85	380	338	105	7.1
50PN2.4S	0.40	50	245	120	85	102	170	85	85	388	346	105	8.5
50PN2.4	0.40	50	245	120	85	102	170	85	85	388	346	105	8.0
50PN2.75S	0.75	50	245	120	85	102	170	85	85	403	361	105	10.8
50PN2.75	0.75	50	245	120	85	102	170	85	85	403	361	105	9.7