

horizontal multi-stage jet/centrifugal pumps

PUMP PERFORMANCE (Capacity in Gallons Per Minute)


CENTRIFUGAL APPLICATION

Catalog Number	HP	Total Suct. Lift Ft.	Discharge Pressure - PSI					Shut-Off Pressure PSI
			20	30	40	50	60	
HMSD	3/4	5	37	30	24	15	-	60
		10	35	29	21	13	-	60
		15	33	27	19	9	-	60
		20	32	26	17	6	-	60
		25	31	24	15	-	-	60
HMSE	1	5	47	40	33	24	10	65
		10	46	38	31	21	7	65
		15	44	36	28	18	-	65
		20	42	35	26	15	-	65
		25	41	33	24	12	-	65
HMSF	1-1/2	5	60	53	46	36	23	68
		10	58	52	43	33	21	68
		15	56	49	41	30	16	68
		20	55	47	39	27	12	68
		25	54	41	36	25	-	68

Tested and rated in accordance with Water Systems Council standards.

NOTE: Pumps installed with a PRO-Source™ tank require a 100 PSI relief valve. Pumps installed with a conventional tank require a 75 PSI relief valve. Relief valve must be capable of relieving entire flow of pump at relief pressure.

OUTLINE DIMENSIONS

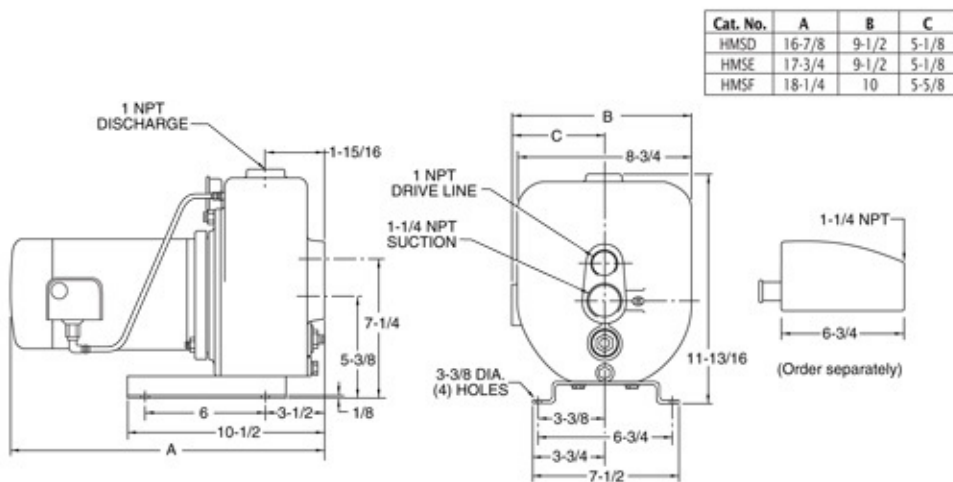

Dimensions (in inches) are for estimating purposes only.