

DSW Series


2" Solids Handling Continuous Duty Stainless Steel Sewage Pumps

SPECIFICATIONS

Applications	domestic wastewater and septic systems	
Capacities	145 GPM	549 LPM
Shut-off head	42'	12.8 m
Solids handling	2"	50.8 mm
Liquids handling	sewage, wastewater, effluent	
Continuous liquid temp	130°F	54°C
Motor electrical data	4/10 HP, 1/2 HP, 115V 1/2 HP, 1 HP, 230V 1 HP, 460V, 3Ø	
Acceptable pH range	5-9	
Discharge, NPT	2" w/90° elbow	
Housing	stainless steel	
Power cord	20', SJOW,	6.1 m
	16 AWG	
Impeller	stainless steel	
Volute case	stainless steel	
Shaft seal	mechanical – carbon & ceramic	

FEATURES

- Pumps up to 145 GPM (1 HP), 114 GPM (1/2 HP) and 103 GPM (4/10 HP)
- Designed for reliable pumping of wastewater
- Stainless steel, corrosion-resistant shaft and hardware
- Oil-cooled and lubricated, continuous-duty PSC motors
- Silicon carbide or carbon ceramic mechanical seals
- Tethered float switches feature piggyback controls
- 20' power cord
- Suitable for continuous use
- Includes 90° discharge elbow
- CSA Listed

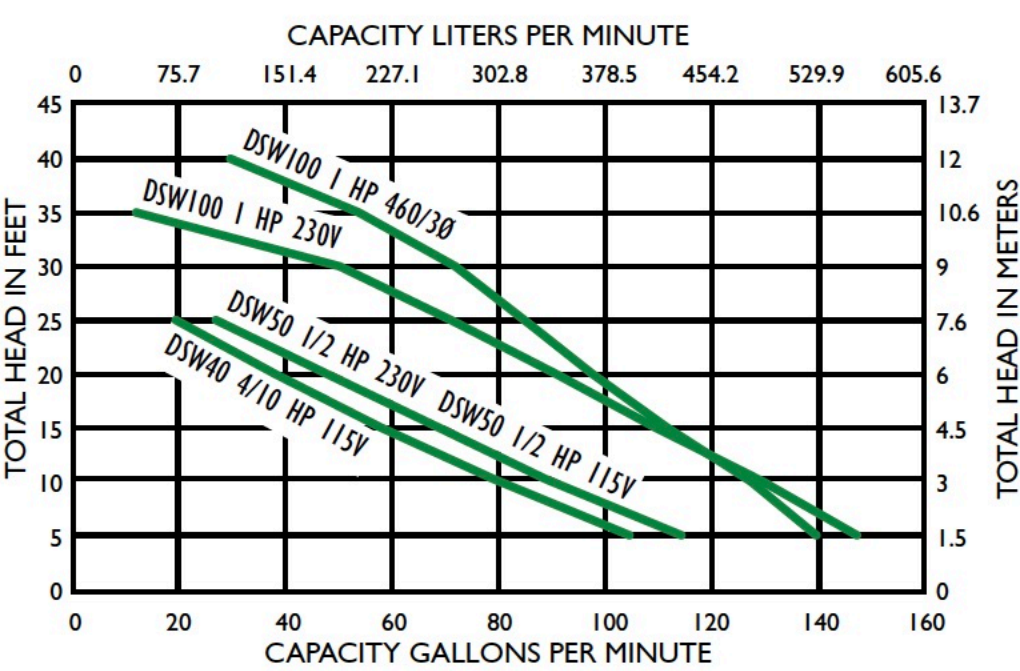

Continuous Duty!

