


MW Series

2" Solids Handling Heavy-Duty Residential and Commercial Sewage Pumps
Available with Single or Double Seals

SPECIFICATIONS

Applications	sewage, high-capacity sump, effluent	
Capacities	165 GPM	624 LPM
Shut-off head	70'	21.3 m
Solids handling	2"	50.8 mm
Liquids handling	domestic sewage & drain water	
Intermittent liquid temp.	up to 140°F	up to 60°C
Motor electrical data	1/2 to 2 HP, 208/230V, 1Ø; 208/230/460/575V, 3Ø, oil-filled, permanent split, capacitor type, 1Ø, 3450 RPM, 60Hz	
Acceptable pH range	5-9	
Discharge, NPT	2"	
Housing	cast iron	
Power cord	10'	
Impeller	ductile iron	
Volute case	class 30 cast iron	
Shaft seal	type 21, carbon & ceramic	
Min. sump diameter		
Simplex:	24"	609.6 mm
Duplex:	36"	914.4 mm

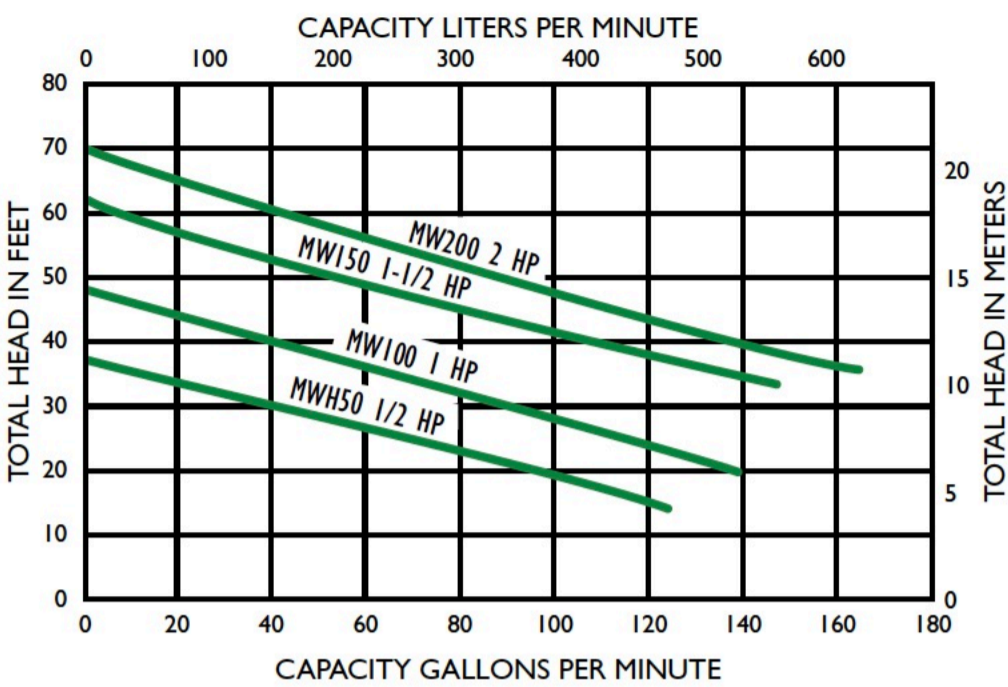

3 YEAR
WARRANTY



FEATURES

- High head performance for demanding applications
- High-efficiency, two-vane, enclosed impeller for high-efficiency pumping
- Eliminates possibility of jamming between impeller and volute
- Original performance can be restored if wear occurs by replacing volute seal ring
- Durable motor will deliver many years of reliable service
- Oil-filled motor for maximum heat dissipation and continuous bearing lubrication
- High-torque, permanent split capacitor (PSC) single-phase motors; no starting switches or relays to wear out
- CSA Listed