

# SRM4


## 4/10 HP Sewage Pump

### SPECIFICATIONS

Applications	sewage, high-capacity sump, effluent	
Capacities	95 GPM	360 LPM
Shut-off head	19'	5.8 m
Solids handling	2"	50.8 mm
Liquids handling	septic effluent and sewage	
Intermittent liquid temp	up to 140°F	up to 60°C
Motor electrical data	4/10 HP, PSC, 115V, 12A, 1Ø, 60Hz	
Acceptable pH range	5-9	
Discharge, NPT	2"	
Housing	heavy cast iron	
Power cord	10'	3.0 m
	(20' optional)	(6.1 m)
Impeller	recessed, thermoplastic	
Volute case	cast iron	
Shaft seal	type 11A, carbon & ceramic	

### FEATURES

- Power for versatile applications
- Residential septic tank sewage
- Large sumps
- Long-lasting performance
- Oil-filled motor for maximum heat dissipation and continuous bearing lubrication
- Recessed vortex impeller for free flow of liquids, solids up to 2" diameter
- Rotary shaft seal has carbon and ceramic faces for positive seal
- Thermal overload protection with automatic reset
- CSA Listed

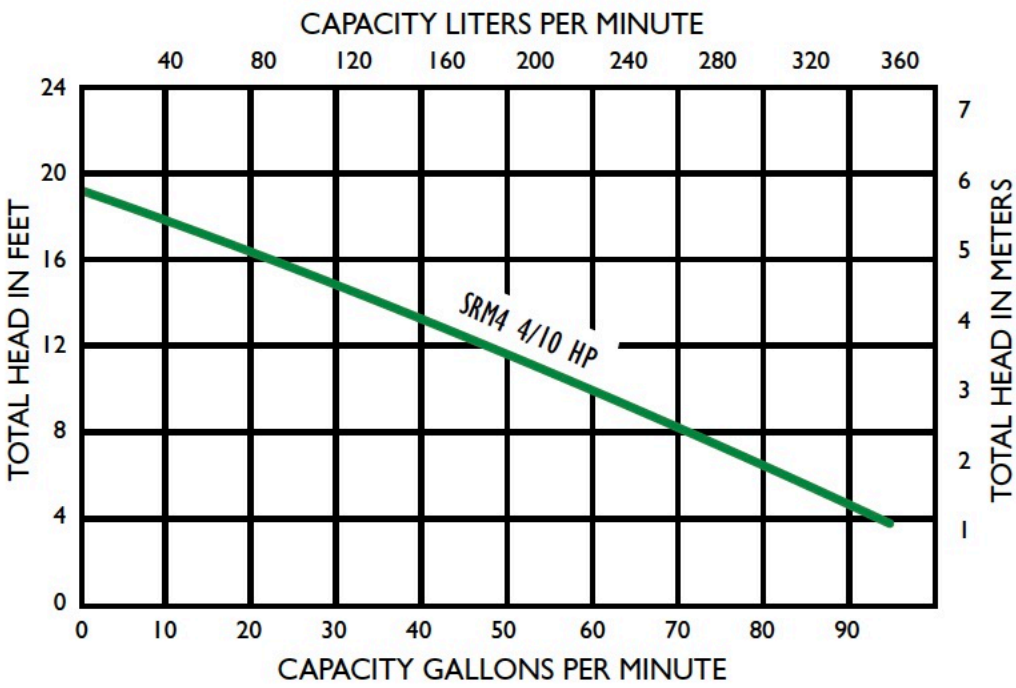

**3 YEAR**  
WARRANTY