



10. Technical data

CR 1s

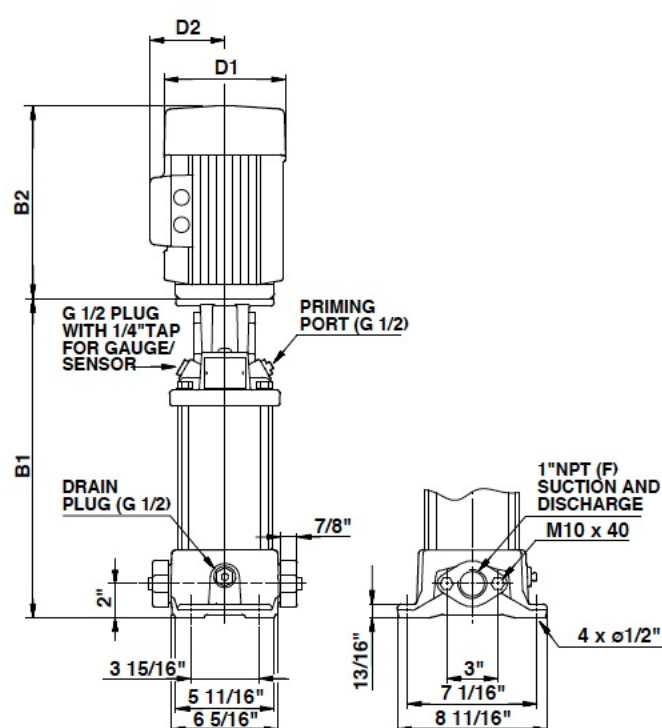

TM03 1450 2205

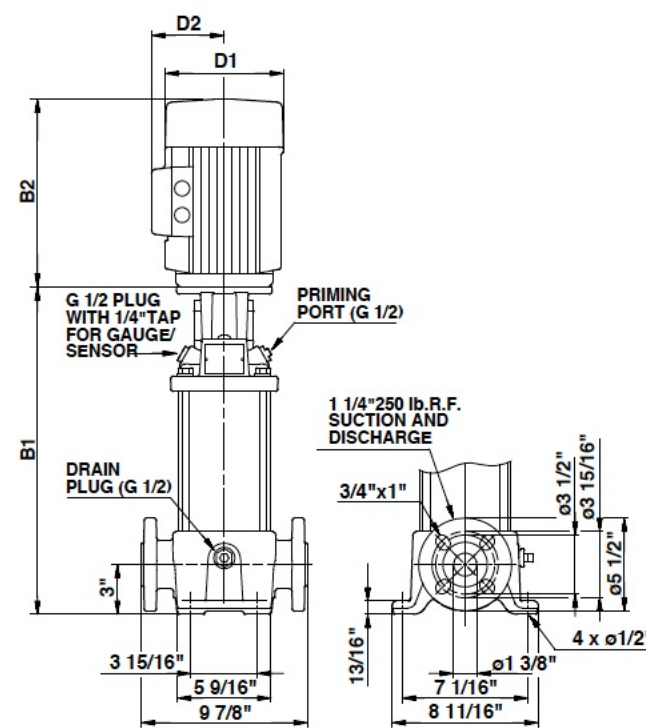

TM03 1451 2205

Pump type	P2 [Hp]	Ph.	Oval*	ANSI dimensions [inch (mm)]				Ship. wt. [lbs (kg)]
				B1	TEFC			
					D1	D2	B1+B2	
CR 1s-2	1/3	1	•	11.97 (305)	6.19 (158)	5.18 (132)	21.26 (541)	69 (32)
		3	•	11.97 (305)	5.55 (141)	4.57 (117)	19.41 (494)	67 (31)
CR 1s-3	1/3	1	•	11.97 (305)	6.19 (158)	5.18 (132)	21.26 (541)	69 (32)
		3	•	11.97 (305)	5.55 (141)	4.57 (117)	19.41 (494)	67 (31)
CR 1s-4	1/3	1	•	12.68 (323)	6.19 (158)	5.18 (132)	21.97 (559)	70 (32)
		3	•	12.68 (323)	5.55 (141)	4.57 (117)	20.12 (512)	68 (31)
CR 1s-5	1/3	1	•	13.39 (341)	6.19 (158)	5.18 (132)	22.68 (577)	71 (33)
		3	•	13.39 (341)	5.55 (141)	4.57 (117)	20.83 (530)	69 (32)
CR 1s-6	1/2	1	•	14.09 (358)	6.19 (158)	5.18 (132)	23.38 (594)	75 (35)
		3	•	14.09 (358)	5.55 (141)	4.57 (117)	21.53 (547)	70 (32)
CR 1s-7	1/2	1	•	14.80 (376)	6.19 (158)	5.18 (132)	24.09 (612)	76 (35)
		3	•	14.80 (376)	5.55 (141)	4.57 (117)	22.24 (565)	71 (33)
CR 1s-8	1/2	1	•	15.51 (394)	6.19 (158)	5.18 (132)	24.80 (630)	77 (35)
		3	•	15.51 (394)	5.55 (141)	4.57 (117)	22.95 (583)	72 (33)
CR 1s-9	3/4	1	•	16.22 (412)	6.19 (158)	5.18 (132)	26.13 (664)	82 (38)
		3	•	16.22 (412)	5.55 (141)	4.57 (117)	23.66 (601)	73 (34)
CR 1s-10	3/4	1	•	16.93 (431)	6.19 (158)	5.18 (132)	26.84 (682)	83 (38)
		3	•	16.93 (431)	5.55 (141)	4.57 (117)	24.37 (619)	74 (34)
CR 1s-11	3/4	1	•	17.64 (449)	6.19 (158)	5.18 (132)	27.55 (700)	84 (39)
		3	•	17.64 (449)	5.55 (141)	4.57 (117)	25.08 (638)	75 (35)
CR 1s-12	3/4	1	•	18.35 (467)	6.19 (158)	5.18 (132)	28.26 (718)	85 (39)
		3	•	18.35 (467)	5.55 (141)	4.57 (117)	25.79 (656)	76 (35)
CR 1s-13	1	1	•	19.06 (485)	7.19 (183)	5.73 (146)	30.25 (769)	101 (46)
		3	•	19.06 (485)	5.55 (141)	4.57 (117)	26.50 (674)	77 (35)
CR 1s-15	1	1	•	20.47 (520)	7.19 (183)	5.73 (146)	31.66 (805)	103 (47)
		3	•	20.47 (520)	5.55 (141)	4.57 (117)	27.91 (709)	78 (36)
CR 1s-17	1 1/2	1	•	21.89 (557)	7.19 (183)	5.73 (146)	33.57 (853)	107 (49)
		3	•	21.89 (557)	5.55 (141)	4.57 (117)	30.51 (775)	84 (39)
CR 1s-19	1 1/2	1	-	23.31 (593)	7.19 (183)	5.73 (146)	34.99 (889)	109 (50)
		3	-	23.31 (593)	5.55 (141)	4.57 (117)	31.93 (812)	86 (40)
CR 1s-21	1 1/2	1	-	24.72 (628)	7.19 (183)	5.73 (146)	36.40 (925)	111 (51)
		3	-	24.72 (628)	5.55 (141)	4.57 (117)	33.34 (847)	88 (40)
CR 1s-23	1 1/2	1	-	26.14 (664)	7.19 (183)	5.73 (146)	37.82 (961)	113 (52)
		3	-	26.14 (664)	5.55 (141)	4.57 (117)	34.76 (883)	90 (41)
CR 1s-25	2	1	-	27.56 (701)	7.19 (183)	5.73 (146)	40.12 (1020)	126 (58)
		3	-	27.56 (701)	7.01 (179)	4.33 (110)	38.78 (986)	116 (53)
CR 1s-27	2	1	-	28.98 (737)	7.19 (183)	5.73 (146)	41.54 (1056)	127 (58)
		3	-	28.98 (737)	7.01 (179)	4.33 (110)	40.20 (1022)	118 (54)

All dimensions in inches unless otherwise noted.

* Oval flanged pump B1 and B1+B2 dimension is one inch less than ANSI flanged pump and weight is approximately 9 lbs. less.

- Available.