



CR 10

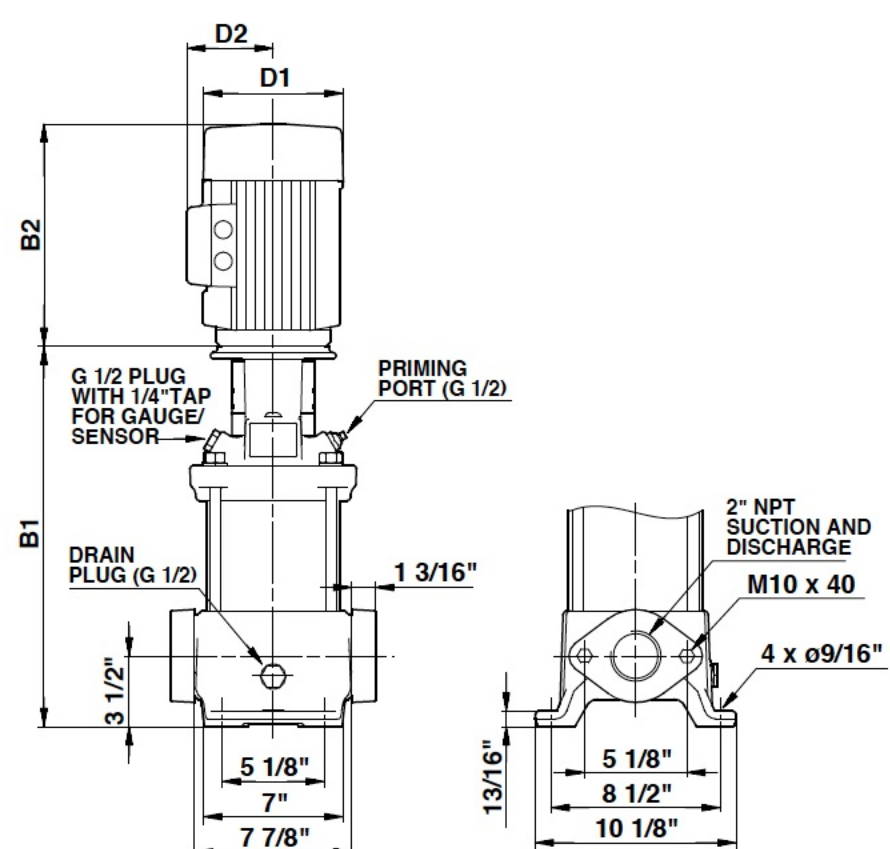

TM03 1460 2205

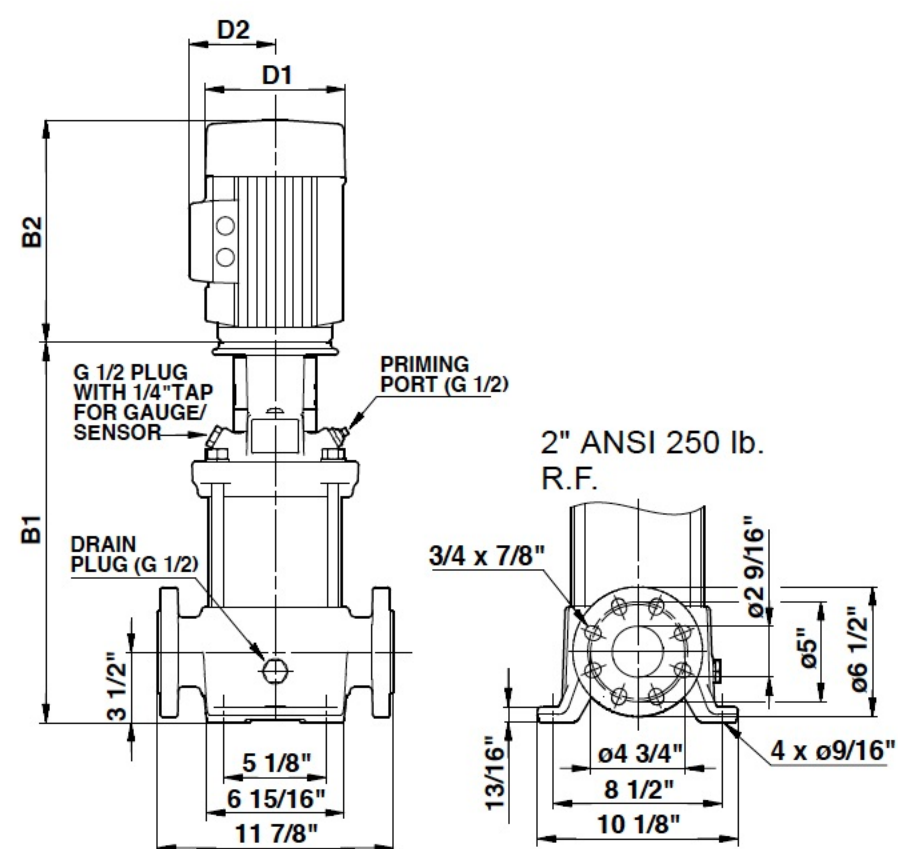

TM03 1461 2205

ANSI dimensions [inch (mm)]											
Pump type	P2 [Hp]	Ph.	Oval*	B1	TEFC			ODP			Ship. wt. [lbs (kg)]
					D1	D2	B1+B2	D1	D2	B1+B2	
CR 10-1	3/4	1	•	15.28 (389)	6.19 (158)	5.18 (132)	25.19 (640)	-	-	-	115 (53)
		3	•	15.28 (389)	5.55 (141)	4.57 (117)	22.72 (578)	-	-	-	106 (49)
CR 10-2	1 1/2	1	•	15.28 (389)	7.19 (183)	5.73 (146)	26.96 (685)	-	-	-	128 (59)
		3	•	15.28 (389)	5.55 (141)	4.57 (117)	23.90 (608)	-	-	-	106 (49)
CR 10-3	3	1	•	17.20 (437)	8.60 (219)	6.87 (175)	31.85 (809)	-	-	-	183 (84)
		3	•	17.20 (437)	7.01 (179)	4.33 (110)	30.43 (773)	-	-	-	153 (70)
CR 10-4	3	1	•	18.39 (468)	8.60 (219)	6.87 (175)	33.04 (840)	-	-	-	183 (84)
		3	•	18.39 (468)	7.01 (179)	4.33 (110)	31.62 (804)	-	-	-	156 (71)
CR 10-5	5	1	•	19.57 (498)	10.62 (270)	7.46 (190)	35.09 (892)	-	-	-	209 (95)
		3	•	19.57 (498)	8.66 (220)	5.28 (135)	35.08 (892)	-	-	-	206 (94)
CR 10-6	5	1	•	20.75 (528)	10.62 (270)	7.46 (190)	36.27 (922)	-	-	-	212 (97)
		3	•	20.75 (528)	8.66 (220)	5.28 (135)	36.26 (922)	-	-	-	208 (95)
CR 10-7	7 1/2	1	-	22.25 (566)	10.22 (260)	7.62 (194)	37.78 (960)	-	-	-	232 (106)
		3	-	22.25 (566)	8.66 (220)	5.28 (135)	37.76 (960)	-	-	-	221 (101)
CR 10-8	7 1/2	1	-	23.43 (596)	10.22 (260)	7.62 (194)	38.96 (990)	-	-	-	234 (107)
		3	-	23.43 (596)	8.66 (220)	5.28 (135)	38.94 (990)	-	-	-	223 (102)
CR 10-9	7 1/2	1	-	24.61 (626)	10.22 (260)	7.62 (194)	40.14 (1020)	-	-	-	236 (108)
		3	-	24.61 (626)	8.66 (220)	5.28 (135)	40.12 (1020)	-	-	-	225 (103)
CR 10-10	7 1/2	1	-	25.79 (656)	10.22 (260)	7.62 (194)	41.32 (1050)	-	-	-	238 (108)
		3	-	25.79 (656)	8.66 (220)	5.28 (135)	41.30 (1050)	-	-	-	227 (103)
CR 10-12	10	1	-	28.15 (716)	10.23 (260)	10.30 (262)	44.22 (1124)	-	-	-	355 (162)
		3	-	28.15 (716)	10.24 (261)	6.26 (160)	42.88 (1090)	-	-	-	232 (106)
CR 10-14	15	3	-	33.06 (840)	12.36 (314)	8.00 (204)	51.60 (1311)	10.62 (270)	7.33 (187)	49.37 (1254)	414 (188)
CR 10-16	15	3	-	35.43 (900)	12.36 (314)	8.00 (204)	53.97 (1371)	10.62 (270)	7.33 (187)	51.74 (1315)	422 (192)
CR 10-17	15	3	-	37.80 (961)	12.36 (314)	8.00 (204)	56.34 (1432)	10.62 (270)	7.33 (187)	54.11 (1375)	426 (194)

All dimensions in inches unless otherwise noted.

* Oval flanged pump B1 and B1+B2 dimension is equal to ANSI flanged pumps and weight is approximately 3 lbs. less.

- Available.